

Engineering Guideline

pac-Carriers Type 9195

Universal



Integration of conventional process automation interfaces - pac Carrier


The pac carrier reflects the intention of R. STAHL to provide state-of-the-art concepts tailored to the needs of process automation and machine manufacturing. It is designed to reduce the cost of installation by space saving compact design and simplified installation. The Ex i/l.S. isolators can be mounted without the need for a tool. The intrinsically safe signal is directly connected to the modules by means of two different types of detachable connectors - screw type or cage clamp type.

The connection to the control system I/O module is simply done by connecting a customer specific cable to the screw terminal of the pac Carrier.

The use of the pac Carrier reduces the required time for installation and enables pre-wiring for later upgrades.


Your benefits:

- The most flexible system for the integration of Ex i/l.S. signals
- Complete line fault transparency - no blind spots
- Compact and rugged installation
- Pre-wiring enables easy and fault proved upgrade
- Systems for installation in hazardous location for the control system and Ex i/l.S. isolation made by STAHL

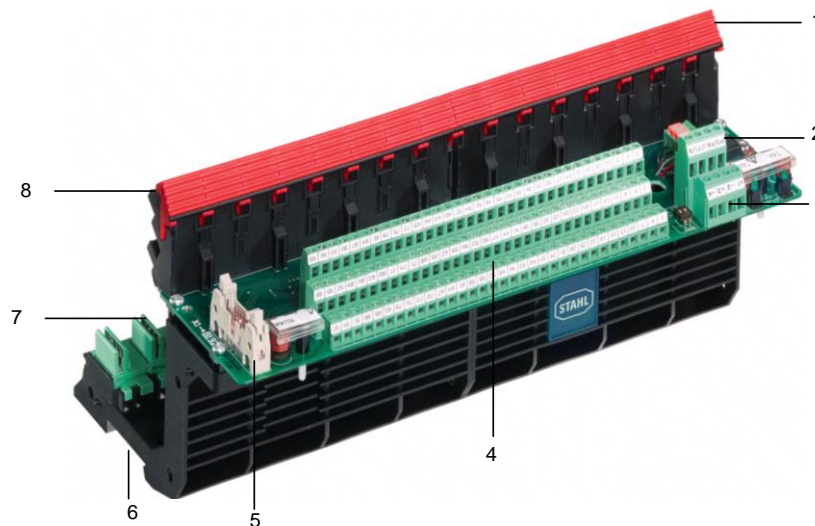

Example of 16 Slots Carrier

1. Ejector mechanism
2. Redundant and fused supply
3. Power supply failure and line fault signaling via relay contact
4. Interface for field signal connection w/o Ex i/l.S. isolator
5. Connector for HART Multiplexer type 9192/32
6. Installation on DIN rail or mounting plate
7. Integrated pac bus for power supply and line-fault signaling
8. Reliable snap-in mechanism, without tool

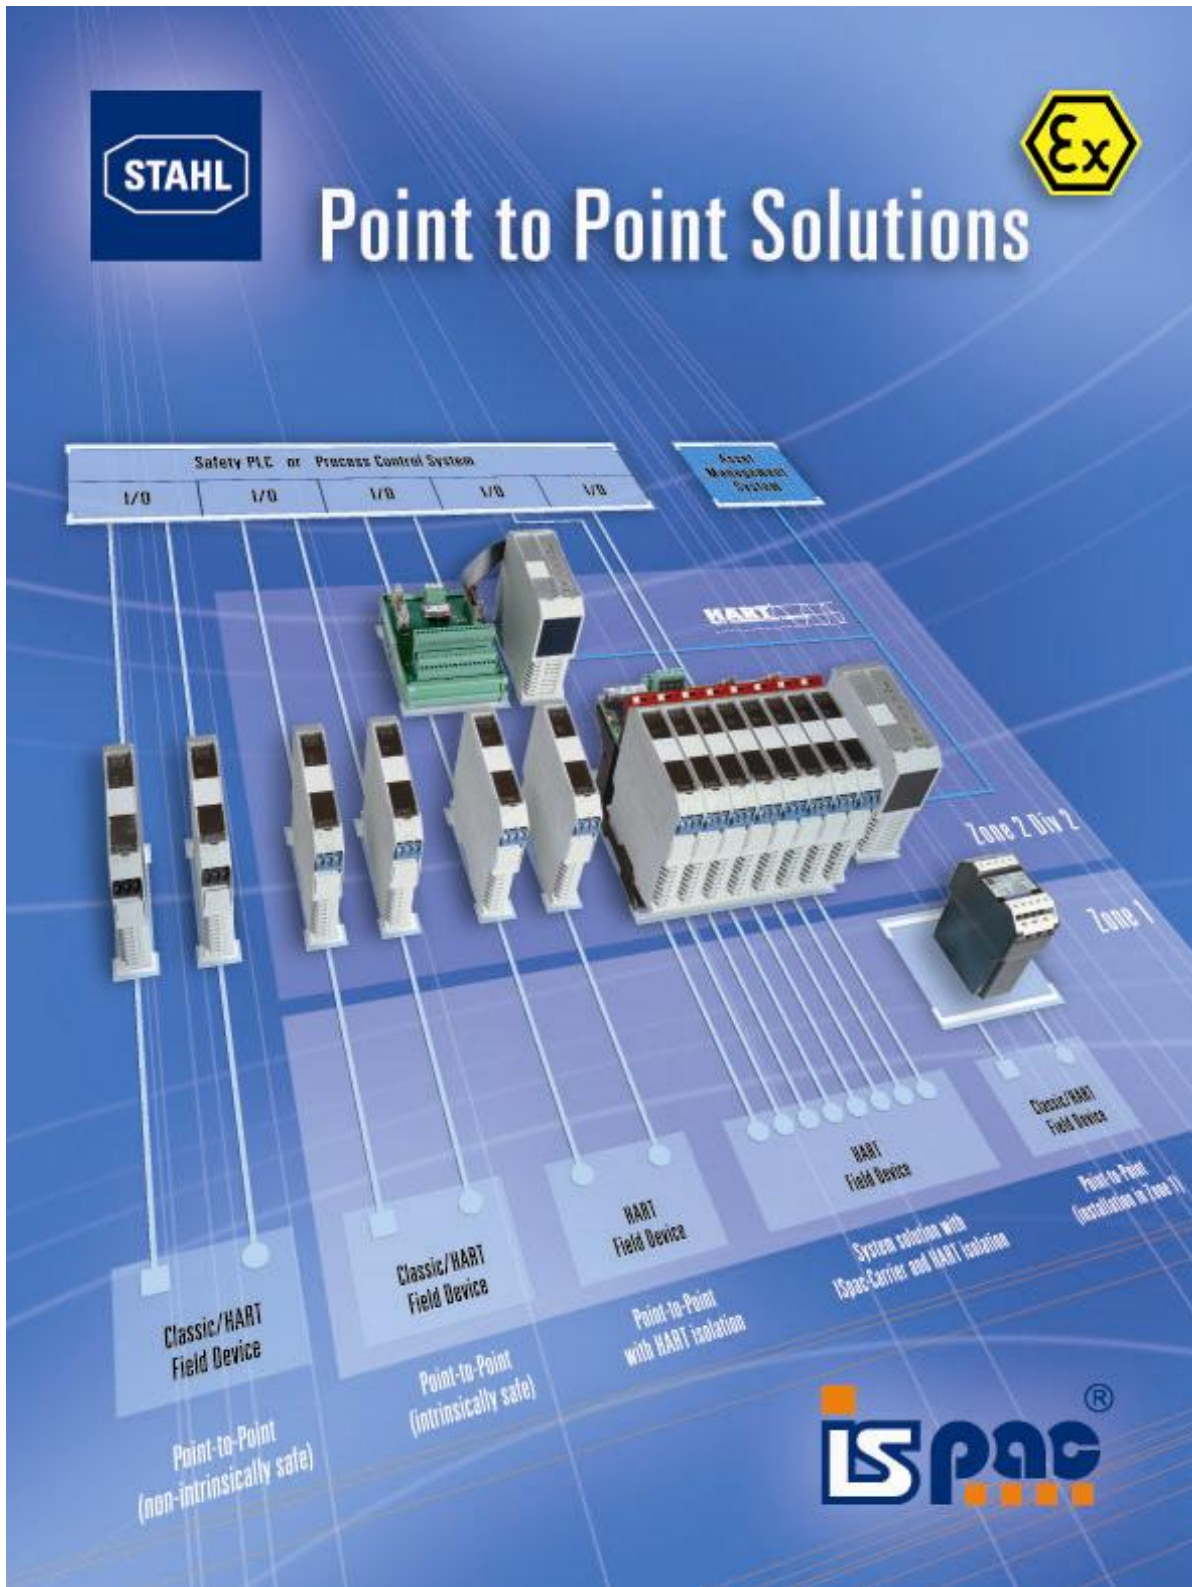


Content

| Control system | | pac-Carrier | | | | | |
|----------------|----------|-------------|------------------|----------|-------------------|---------------|-------|
| Signal type | Channels | Slots | Stahl cable type | HART-MUX | pac-Carrier type | ISpac | page |
| DI, DO, AI AO | 32 | 16 | without | NO | 9195/16A-XX0-01C | ALL | 7-12 |
| | | | | 9192/32 | 9195/16H-XX0-01C | | 13-17 |
| AI | 16 | 8 | 9195/C-009 | NO | 9195/08A-XX0-03A5 | 9160/23-10-11 | 18-22 |
| AO | | | | | | 9182/20-59-11 | |
| DI | 32 | 16 | 9195/C-009 | NO | 9195/16A-XX0-03B3 | 9165/26-11-11 | 23-28 |
| DO | | | | | | 9170/20-10-11 | |
| | | | | | | 9175/20-1X-11 | |
| | | | | | | 9176/20-1X-00 | |

**pac-Carrier
Type 9195/16A-XX0-01C**


- Signal types: AI / AO / DI / DO
- pac-Carrier for 16 modules, up to 32 signals
- all ISpac isolators can be mounted
- Redundant power supply with fault signalization contact and exchangeable fuses
- Horizontal or vertical installation
- Simple installation on DIN rail or mounting plate
- Many labeling possibilities
- Fast and secure installation of the isolators without tools
- Comfortable exchange of the isolators with secured ejector mechanism
- Installation possible in Zone 2, Zone 22 (non conductible dust) and Div. 2

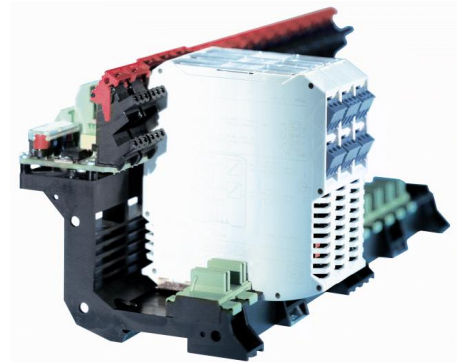

05179E00

Comfortable and simple integration of the Ex i/I.S. isolators ISpac. Flexible wiring possibilities on the system side with screw terminals.

System overview

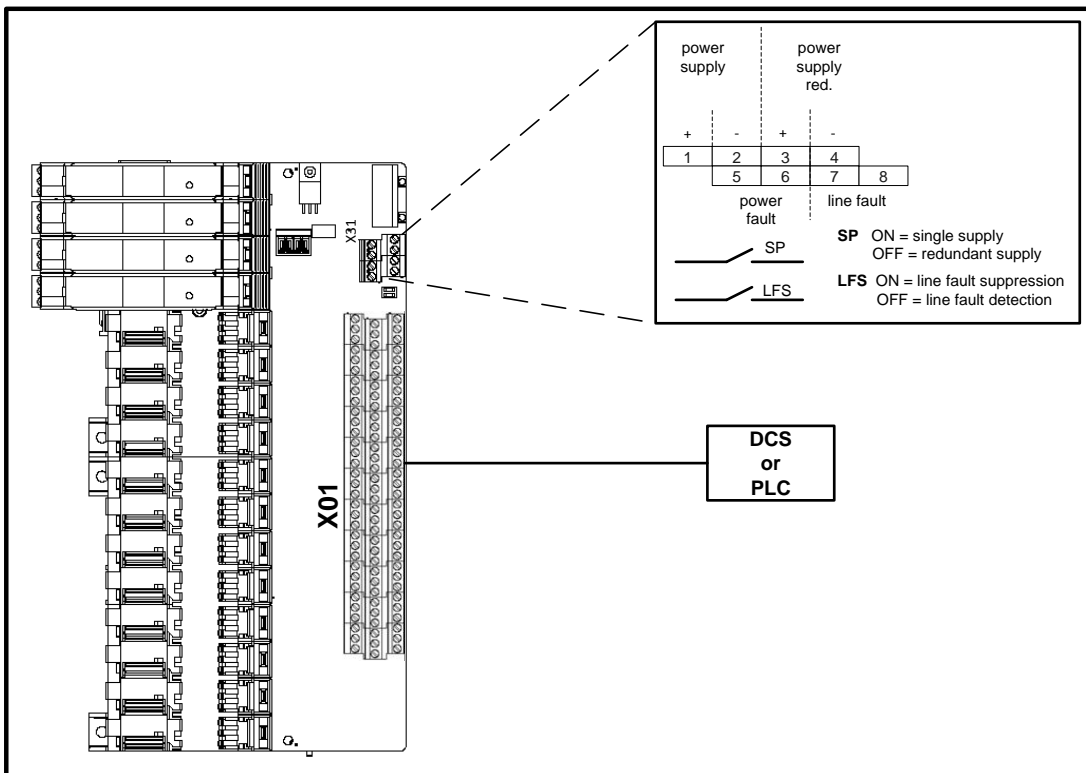

Selection table

| Control system | | | pac-Carrier | | | |
|------------------|----------|------------------|-------------|----------|------------|------------------|
| DCS manufacturer | DCS type | I/O-cards type | Slots | HART-MUX | Redundancy | Type |
| all | all | AI / AO/ DI / DO | 16 | no | no | 9195/16A-XX0-01C |

Technical data

| | |
|-------------------------------------|---|
| Certificates | BVS 03 ATEX E213 X |
| Explosion protection | ⊕ II 3 G Ex nA nC II T4 |
| Installation | In Zone 2, Zone 22 (non conductible dust), Div. 2 and in the safe area |
| Power supply | (X31) |
| Nominal voltage U_N | 24 V DC (19 V ... 31,2 V) |
| Redundant supply | yes, decoupled with diodes |
| Indication | 2 LED green „PWR1“; „PWR2“ |
| Fuse | 2 x TR5; T 2,0 A; exchangeable, for primary and redundant supply |
| Polarity reversal protection | yes |
| Connection field devices | |
| Connection | at the terminals of the Exi/I.S. isolators (see "signal loops") |
| Number of channels | 32 |
| Connection automation system | (X01) |
| Connection | Customer specific cable |
| Number of channels | up to 32 |
| Error messaging | (X31) |
| Power supply failure PF | Contact (35 V / 100 mA), closed in good conditions |
| Line fault LF (of ISpac modules) | Contact (35 V / 100 mA), closed in good conditions |
| Setting switch „SP“ | Power failure message suppressed for redundant supply (single supply) |
| Setting switch „LFS“ | Line fault message suppressed |
| Ambient conditions | |
| Ambient temperature | max. - 20 °C ... + 70 °C (see specification of the Ex i/I.S. isolators) |
| Storage temperature | - 40 °C ... + 80 °C |
| Relative humidity (no condensation) | ≤95 % |
| Mechanical data | |
| Weight | approx. 320 g |
| Mounting type | on DIN rail or mounting plate (4 x screw M6) |
| Mounting position | horizontal or vertical |
| Casing / Terminal protection class | IP 00 / IP 20 |
| Casing material | PA 6.6 |
| Fire protecting class (UL-94) | V0 |


Signal loops

The diagrams below show typical applications. Please refer to the connection list to get the entire connection scheme. Basic technical parameters of the ISpac isolating repeaters can be found at the end of this document. The detailed specifications can be downloaded at: www.ispac.info.

We offer for types 9146, 9162 und 9182 compact trip amplifier with 2 configurable limit values

Frequency transmitter


The frequency transmitter allows to monitor the speed of rotating devices in the hazardous area

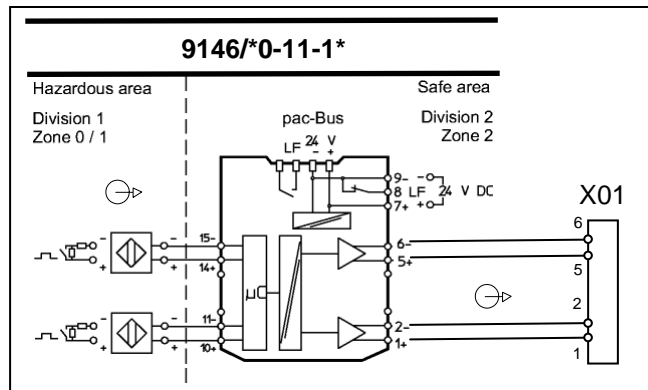

Transmitter supply unit (AI)

for 2-, 3-wire transmitter and mA sources
for 2-wire transmitter with HART


Alternative: Loop powered type 9162 and 9163

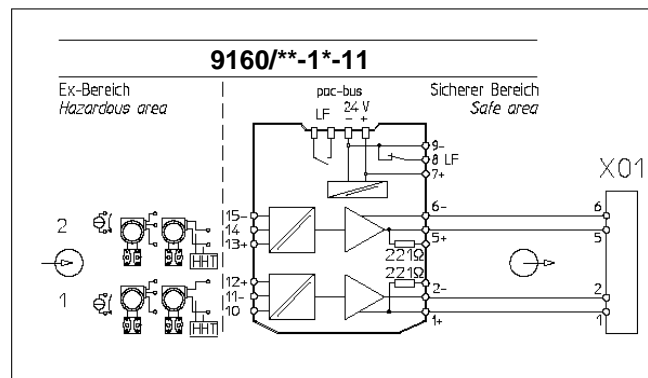

Isolating repeater (AO)


for control valves, i/p-converters or indicators
bi-directional HART communication

Alternative: Loop powered type 9167

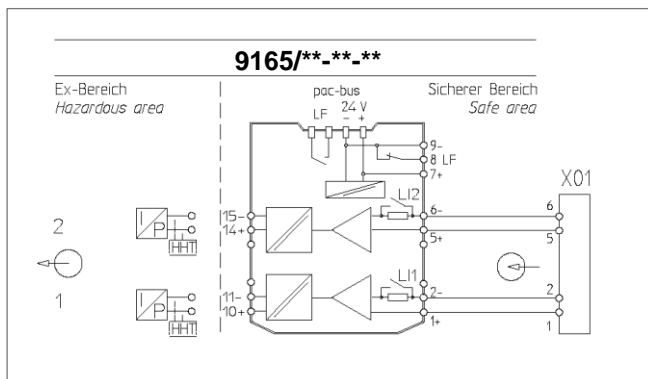

Switching repeater (DI)


for NAMUR proximity switches and contacts

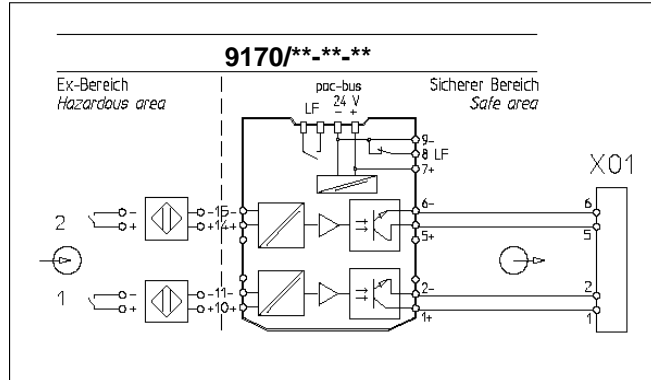

Digital output (DO)


for solenoid valves and indicators

Alternative: Loop powered type 9176

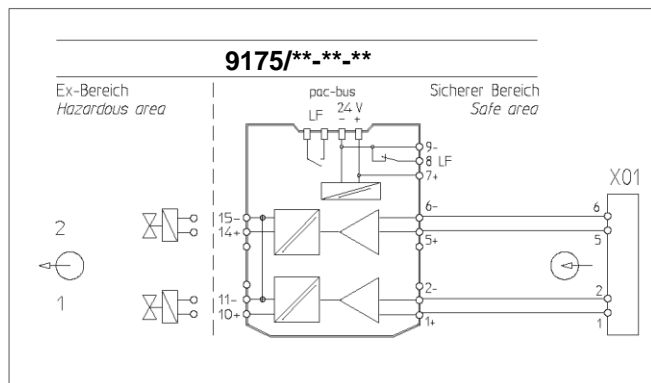


Temperature transmitter (AI)

for resistance thermometer, thermocouple and RTD (Configuration by means of DIP switches or ISpac Wizard software)

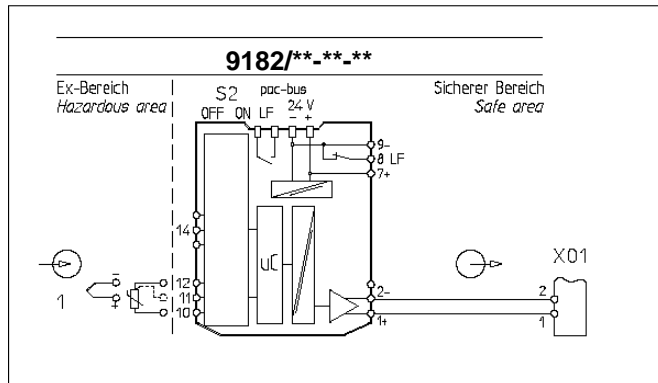


*) Suitable for 4-wire (Pins: 10, 11, 12, and 14).
The connection of two sensors in 4-wire scheme requires an additional external terminal.



| Accessories and Spare Parts | | | |
|-----------------------------|---|---|----------------|
| Designation | Illustration | Description | Order number |
| Non-Ex i Termination Module |  <p>06314E00</p> | The termination module is used to integrate non-Ex i field circuit into the system integration solution pac-Carrier type 9195. In such a way it enables a flexible mixture of Ex i and non-Ex i field circuits. | 9191/20-00-50s |

Dimension drawings (all dimensions in mm) - subject to alterations

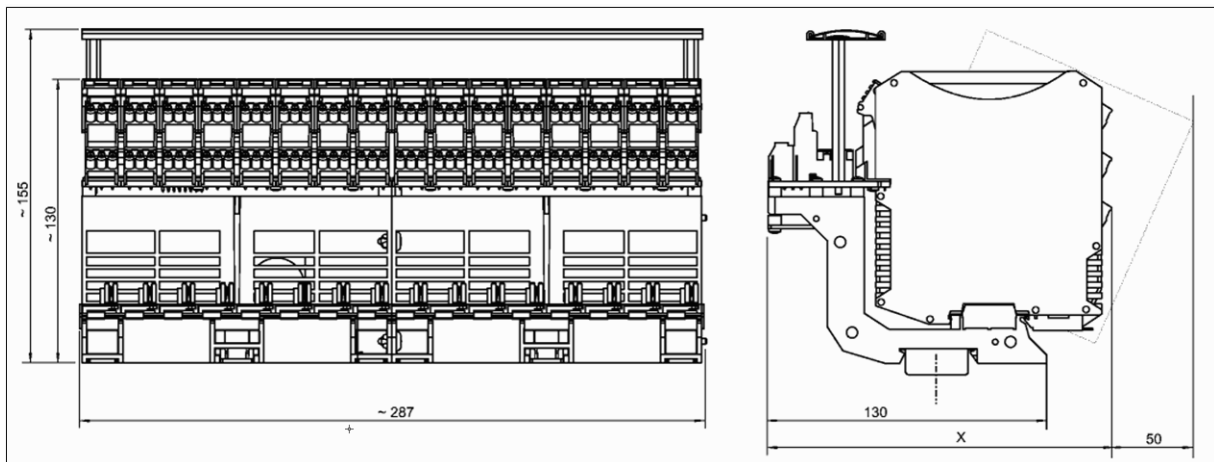

12472E00

| | Dimension x |
|----------------------|-------------|
| Screw terminals | 176 mm |
| Cage clamp terminals | 186 mm |

Please note: In order to snap in the ISpac modules an extra space of approx. 50 mm is required. Please read the "ISpac engineering guideline" carefully before you start to engineer the enclosures with incorporated ISpac modules with or without pac-Carriers. The "ISpac engineering guideline" can be downloaded from: www.ispac.info.



Connection list

Connection to field devices (Ex i / I.S.)

| notes | i.s terminal module | slot no. | terminal module | terminal X 01 | notes | i.s terminal module | slot no. | terminal module | terminal X 01 |
|-------|---------------------|----------|-----------------|---------------|-------|---------------------|----------|-----------------|---------------|
| *1 | 10 | 1 | 1 | 1 | *1 | 10 | 9 | 1 | 49 |
| | 11 | | 2 | 2 | | 2 | | 50 | |
| | 12 | | 3 | 3 | | 3 | | 51 | |
| | 13 | | 4 | 4 | | 4 | | 52 | |
| | 14 | | 5 | 5 | | 5 | | 53 | |
| | 15 | | 6 | 6 | | 6 | | 54 | |
| *1 | 10 | 2 | 1 | 7 | *1 | 10 | 10 | 1 | 55 |
| | 11 | | 2 | 8 | | 2 | | 56 | |
| | 12 | | 3 | 9 | | 3 | | 57 | |
| | 13 | | 4 | 10 | | 4 | | 58 | |
| | 14 | | 5 | 11 | | 5 | | 59 | |
| | 15 | | 6 | 12 | | 6 | | 60 | |
| *1 | 10 | 3 | 1 | 13 | *1 | 10 | 11 | 1 | 61 |
| | 11 | | 2 | 14 | | 2 | | 62 | |
| | 12 | | 3 | 15 | | 3 | | 63 | |
| | 13 | | 4 | 16 | | 4 | | 64 | |
| | 14 | | 5 | 17 | | 5 | | 65 | |
| | 15 | | 6 | 18 | | 6 | | 66 | |
| *1 | 10 | 4 | 1 | 19 | *1 | 10 | 12 | 1 | 67 |
| | 11 | | 2 | 20 | | 2 | | 68 | |
| | 12 | | 3 | 21 | | 3 | | 69 | |
| | 13 | | 4 | 22 | | 4 | | 70 | |
| | 14 | | 5 | 23 | | 5 | | 71 | |
| | 15 | | 6 | 24 | | 6 | | 72 | |
| *1 | 10 | 5 | 1 | 25 | *1 | 10 | 13 | 1 | 73 |
| | 11 | | 2 | 26 | | 2 | | 74 | |
| | 12 | | 3 | 27 | | 3 | | 75 | |
| | 13 | | 4 | 28 | | 4 | | 76 | |
| | 14 | | 5 | 29 | | 5 | | 77 | |
| | 15 | | 6 | 30 | | 6 | | 78 | |
| *1 | 10 | 6 | 1 | 31 | *1 | 10 | 14 | 1 | 79 |
| | 11 | | 2 | 32 | | 2 | | 80 | |
| | 12 | | 3 | 33 | | 3 | | 81 | |
| | 13 | | 4 | 34 | | 4 | | 82 | |
| | 14 | | 5 | 35 | | 5 | | 83 | |
| | 15 | | 6 | 36 | | 6 | | 84 | |
| *1 | 10 | 7 | 1 | 37 | *1 | 10 | 15 | 1 | 85 |
| | 11 | | 2 | 38 | | 2 | | 86 | |
| | 12 | | 3 | 39 | | 3 | | 87 | |
| | 13 | | 4 | 40 | | 4 | | 88 | |
| | 14 | | 5 | 41 | | 5 | | 89 | |
| | 15 | | 6 | 42 | | 6 | | 90 | |
| *1 | 10 | 8 | 1 | 43 | *1 | 10 | 16 | 1 | 91 |
| | 11 | | 2 | 44 | | 2 | | 92 | |
| | 12 | | 3 | 45 | | 3 | | 93 | |
| | 13 | | 4 | 46 | | 4 | | 94 | |
| | 14 | | 5 | 47 | | 5 | | 95 | |
| | 15 | | 6 | 48 | | 6 | | 96 | |




*1) different possibilities of field device connections
for further information see manuals of 91xx/xx-xx-xx

We reserve the right to make alterations to the technical data, weights, dimensions, designs and products available without notice.
The illustration cannot be considered binding.

**pac-Carrier
Type 9195 / 16H-XX0-01C**


- Signal types: AI / AO / DI / DO / HART
- pac-Carrier for 16 modules, up to 32 signals
- all ISpac isolators can be mounted
- Redundant power supply with fault signalization contact and exchangeable fuses
- Horizontal or vertical installation
- Simple installation on DIN rail or mounting plate
- Many labeling possibilities
- Fast and secure installation of the isolators without tools
- Comfortable exchange of the isolators with secured ejector mechanism
- Installation possible in Zone 2, Zone 22

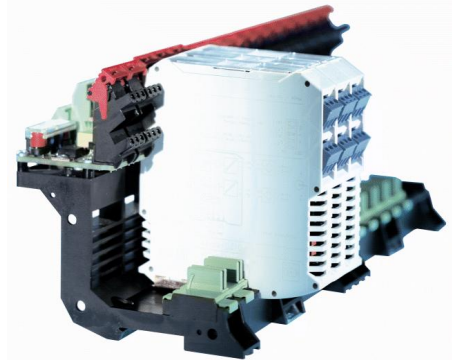

05179E00

Comfortable and simple integration of the Ex i / I.S. isolators ISpac. Flexible wiring possibilities on the system side with screw terminals.

System overview

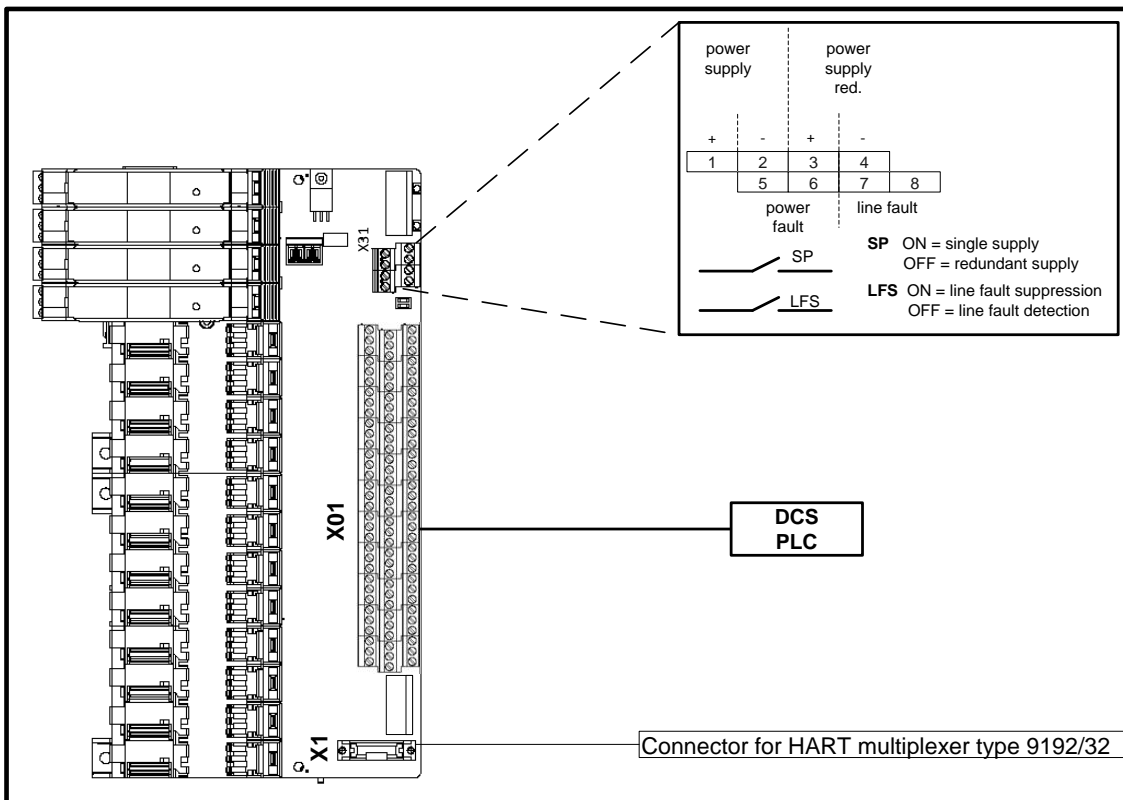

Selection table

| Control system | | | pac-Carrier | | | |
|------------------|----------|--------------------------|-------------|----------|------------|------------------|
| DCS manufacturer | DCS type | I/O-cards type | Slots | HART-MUX | Redundancy | Type |
| all | all | AI / AO / DI / DO / HART | 16 | 9192/32 | Yes | 9195/16H-XX0-01C |

Technical data


| | |
|-------------------------------------|---|
| Certificates | BVS 03 E213 X |
| Explosion protection | ⊕ II 3 G Ex nA nC II T4 |
| Installation | In Zone 2, Zone 22 (non-conductible dust), Div. 2 and in the safe area |
| Power supply | (X31) |
| Nominal voltage U_N | 24 V DC (19 V ... 31,2 V) |
| Redundant supply | yes, decoupled with diodes |
| Indication | 2 LED green „PWR1“; „PWR2“ |
| Fuse | 2 x TR5; T 4,0 A; exchangeable, for primary and redundant supply |
| Polarity reversal protection | yes |
| Connection field devices | |
| Connection | at the terminals of the Ex i/I.S. isolators (see "signal loops") |
| Number of channels | 16 |
| Connection automation system | (X01) |
| Connection | Customer specific cable |
| Number of channels | up to 32 |
| Error messaging | (X31) |
| Power supply failure PF | Contact (35 V / 100 mA), closed in good conditions |
| Line fault LF (of IS pac modules) | Contact (35 V / 100 mA), closed in good conditions |
| Setting switch „SP“ | Power failure message suppressed for redundant supply (single supply) |
| Setting switch „LFS“ | Line fault message suppressed |
| Ambient conditions | |
| Ambient temperature | max. - 20 °C ... + 70 °C (see specification of the Ex i / I.S. isolators) |
| Storage temperature | - 40 °C ... + 80 °C |
| Relative humidity (no condensation) | ≤95 % |
| Mechanical data | |
| Weight | approx. 320 g |
| Mounting type | on DIN rail (NS35 / 15, NS35 / 7.5) or mounting plate (4 x screw M6) |
| Mounting position | horizontal or vertical |
| Casing / Terminal protection class | IP 00 / IP 20 |
| Casing material | PA 6.6 |
| Fire protecting class (UL-94) | V0 |

Signal loops

The diagrams below show typical applications. Please refer to the connection list to get the entire connection scheme. Basic technical parameters of the ISpac isolating repeaters can be found at the end of this document. The detailed specifications can be downloaded at: www.ispac.info.


Transmitter supply unit (AI)
for 2-, 3-wire transmitter and mA sources
for 2-wire transmitter with HART

Alternative: Loop powered type 9162 and 9163

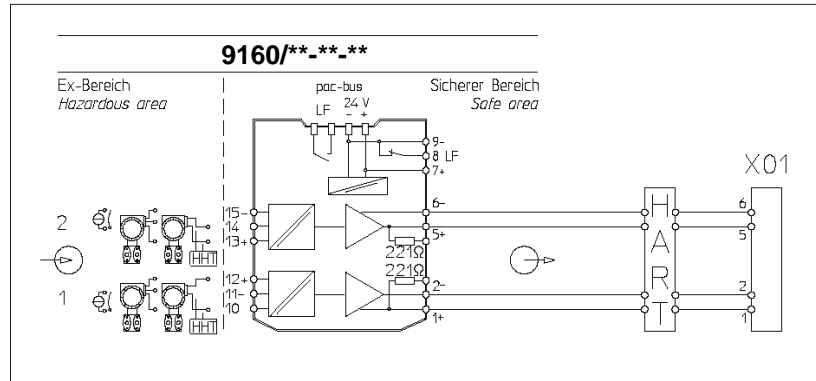


Isolating repeater (AO)
for control valves, i/p-converters or indicators
bi-directional HART communication


Alternative: Loop powered type 9167

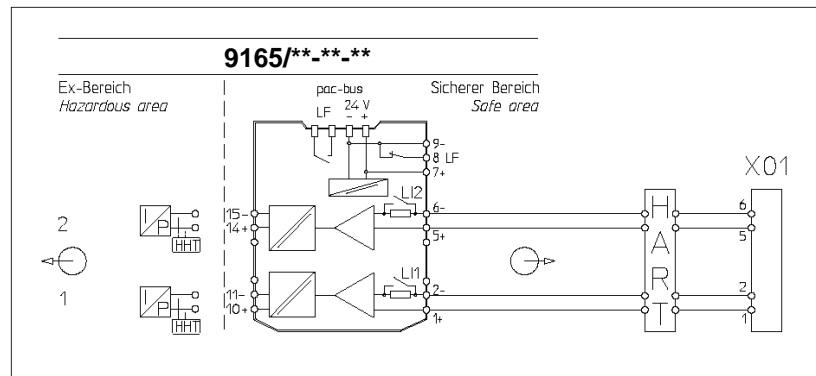

Accessories and Spare Parts

| Designation | Illustration | Description | Order number |
|-----------------------------|---|---|----------------|
| Non-Ex i Termination Module |  06314E00 | The termination module is used to integrate non-Ex i field circuit into the system integration solution pac-Carrier type 9195. In such a way it enables a flexible mixture of Ex i and non-Ex i field circuits. | 9191/20-00-50s |

Dimension drawings (all dimensions in mm) - subject to alterations

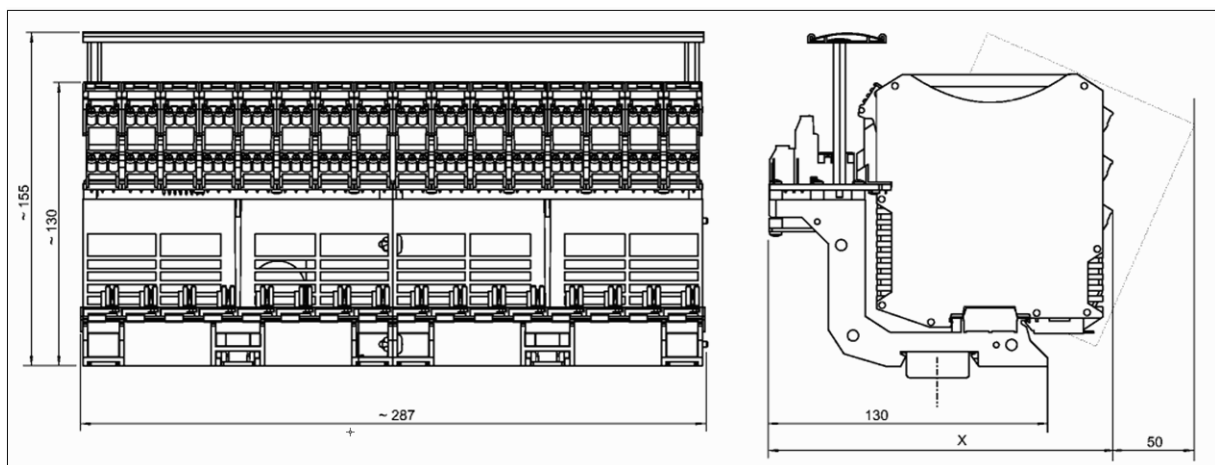

12472E00



| | Dimension x |
|----------------------|-------------|
| Screw terminals | 176 mm |
| Cage clamp terminals | 186 mm |

Please note: In order to snap in the ISpac modules an extra space of approx. 50 mm is required. Please read the "ISpac engineering guideline" carefully before you start to engineer the enclosures with incorporated ISpac modules with or without pac-Carriers. The "ISpac engineering guideline" can be downloaded from: www.ispac.info.

Connection list

Connection to field devices (Ex i / I.S.)

| notes | i.s terminal module | slot no. | terminal module | terminal X 01 | notes | i.s terminal module | slot no. | terminal module | terminal X 01 |
|-------|---------------------|----------|-----------------|---------------|-------|---------------------|----------|-----------------|---------------|
| *1 | 10 | 1 | 1 | 1 | *1 | 10 | 9 | 1 | 49 |
| | 11 | | 2 | 2 | | 2 | | 50 | |
| | 12 | | 3 | 3 | | 3 | | 51 | |
| | 13 | | 4 | 4 | | 4 | | 52 | |
| | 14 | | 5 | 5 | | 5 | | 53 | |
| | 15 | | 6 | 6 | | 6 | | 54 | |
| *1 | 10 | 2 | 1 | 7 | *1 | 10 | 10 | 1 | 55 |
| | 11 | | 2 | 8 | | 2 | | 56 | |
| | 12 | | 3 | 9 | | 3 | | 57 | |
| | 13 | | 4 | 10 | | 4 | | 58 | |
| | 14 | | 5 | 11 | | 5 | | 59 | |
| | 15 | | 6 | 12 | | 6 | | 60 | |
| *1 | 10 | 3 | 1 | 13 | *1 | 10 | 11 | 1 | 61 |
| | 11 | | 2 | 14 | | 2 | | 62 | |
| | 12 | | 3 | 15 | | 3 | | 63 | |
| | 13 | | 4 | 16 | | 4 | | 64 | |
| | 14 | | 5 | 17 | | 5 | | 65 | |
| | 15 | | 6 | 18 | | 6 | | 66 | |
| *1 | 10 | 4 | 1 | 19 | *1 | 10 | 12 | 1 | 67 |
| | 11 | | 2 | 20 | | 2 | | 68 | |
| | 12 | | 3 | 21 | | 3 | | 69 | |
| | 13 | | 4 | 22 | | 4 | | 70 | |
| | 14 | | 5 | 23 | | 5 | | 71 | |
| | 15 | | 6 | 24 | | 6 | | 72 | |
| *1 | 10 | 5 | 1 | 25 | *1 | 10 | 13 | 1 | 73 |
| | 11 | | 2 | 26 | | 2 | | 74 | |
| | 12 | | 3 | 27 | | 3 | | 75 | |
| | 13 | | 4 | 28 | | 4 | | 76 | |
| | 14 | | 5 | 29 | | 5 | | 77 | |
| | 15 | | 6 | 30 | | 6 | | 78 | |
| *1 | 10 | 6 | 1 | 31 | *1 | 10 | 14 | 1 | 79 |
| | 11 | | 2 | 32 | | 2 | | 80 | |
| | 12 | | 3 | 33 | | 3 | | 81 | |
| | 13 | | 4 | 34 | | 4 | | 82 | |
| | 14 | | 5 | 35 | | 5 | | 83 | |
| | 15 | | 6 | 36 | | 6 | | 84 | |
| *1 | 10 | 7 | 1 | 37 | *1 | 10 | 15 | 1 | 85 |
| | 11 | | 2 | 38 | | 2 | | 86 | |
| | 12 | | 3 | 39 | | 3 | | 87 | |
| | 13 | | 4 | 40 | | 4 | | 88 | |
| | 14 | | 5 | 41 | | 5 | | 89 | |
| | 15 | | 6 | 42 | | 6 | | 90 | |
| *1 | 10 | 8 | 1 | 43 | *1 | 10 | 16 | 1 | 91 |
| | 11 | | 2 | 44 | | 2 | | 92 | |
| | 12 | | 3 | 45 | | 3 | | 93 | |
| | 13 | | 4 | 46 | | 4 | | 94 | |
| | 14 | | 5 | 47 | | 5 | | 95 | |
| | 15 | | 6 | 48 | | 6 | | 96 | |




*1) different possibilities of field device connections
for further information see manuals of 91xx/xx-xx-xx

We reserve the right to make alterations to the technical data, weights, dimensions, designs and products available without notice.
The illustration cannot be considered binding.

**pac-Carrier
Type 9195/08A-XX0-03A5**

- Signal types: 16 x AI or 16 x AO
- pac-Carrier for 8 modules, up to 16 signals
- ISpac isolator 9160/23-10-11, 9165/26-11-11 and 9182/20-59-11 can be used
- Customized system cable type 9195/C-009 to automation systems
- Redundant power supply with message contact and exchangeable fuses
- Horizontal or vertical installation
- Simple installation on DIN rail or mounting plate
- Many labeling possibilities
- Fast and secure installation of the isolators without tools
- Comfortable exchange of the isolators with secured ejector mechanism
- Installation possible in Zone 2, Zone 22 (non conductible dust) and Div. 2

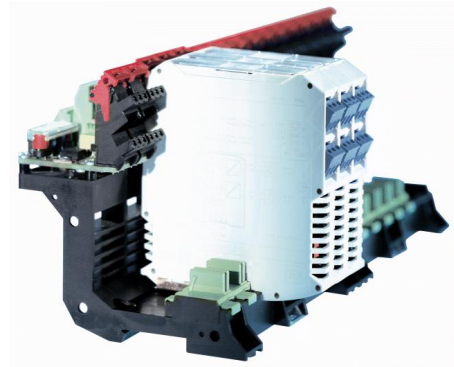


05179E00

Comfortable and simple integration of the Ex i / I.S. isolators ISpac. Flexible wiring possibilities on the system side with screw terminals.



System overview

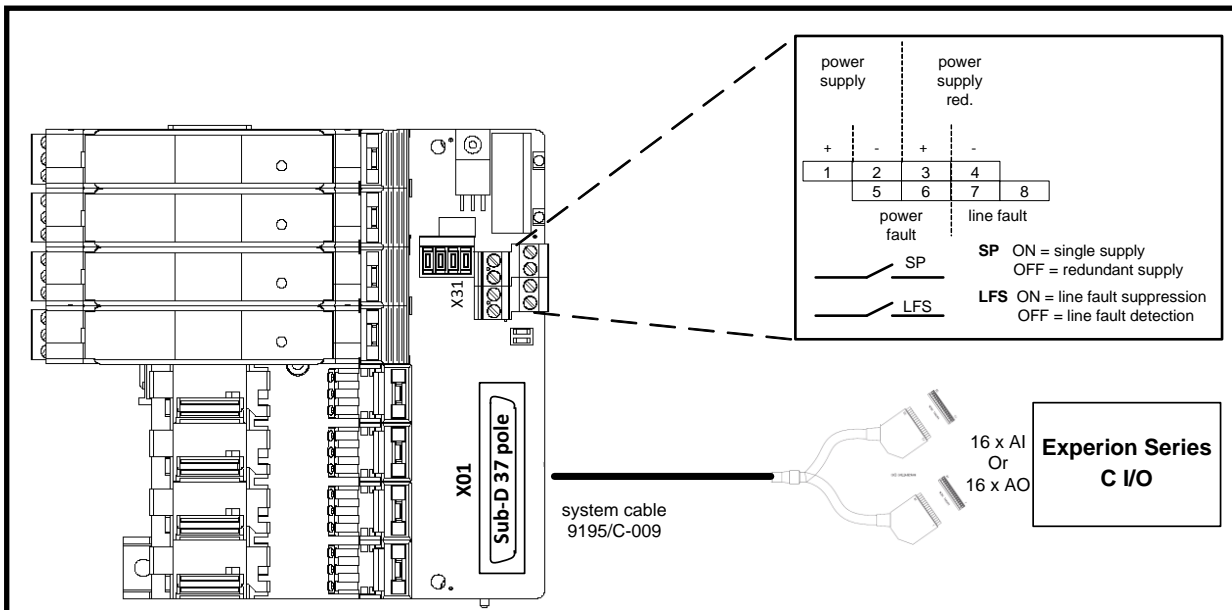


| Selection table | | | | | |
|-------------------------------------|----------|--|-------------|------------------|-------------------|
| Control system | | | pac-Carrier | | |
| DCS manufacturer | DCS type | Signal type | Slots | Stahl Cable type | Type |
| ALL | ALL | 16 x AI | 8 | 9195/C-009 | 9195/08A-XX0-03A5 |
| | | 16 x AO | | | |
| Technical data | | | | | |
| Certificates | | BVS 03 ATEX E213 X | | | |
| Explosion protection | | ⊕ II 3 G Ex nA nC II T4 | | | |
| Installation | | In Zone 2, Zone 22 (non conductible dust), Div. 2 and in the safe area | | | |
| Power supply | | (X31) | | | |
| Nominal voltage U _N | | 24 V DC (19 V ... 31,2 V) | | | |
| Redundant supply | | yes, decoupled with diodes | | | |
| Indication | | 2 LED green „PWR1“; „PWR2“ | | | |
| Fuse | | 2 x TR5; T 2,0 A; exchangeable, for primary and redundant supply | | | |
| Polarity reversal protection | | yes | | | |
| Connection field devices | | | | | |
| Connection | | at the terminals of the I.S. isolators (see “signal loops”) | | | |
| Number of channels | | 16 | | | |
| Connection automation system | | (X01) | | | |
| Connection | | plug Sub-D 37 pole for 9195/C-009 | | | |
| Number of channels | | up to 16 | | | |
| Error messaging | | (X31) | | | |
| Power supply failure PF | | Contact (35 V / 100 mA), closed in good conditions | | | |
| Line fault LF (of ISpac modules) | | Contact (35 V / 100 mA), closed in good conditions | | | |
| Setting switch „SP“ | | Power failure message suppressed for redundant supply (single supply) | | | |
| Setting switch „LFS“ | | Line fault message suppressed | | | |
| Ambient conditions | | | | | |
| Ambient temperature | | max. - 20 °C ... + 70 °C (see specification of the I.S. isolators) | | | |
| Storage temperature | | - 40 °C ... + 80 °C | | | |
| Relative humidity (no condensation) | | ≤95 % | | | |
| Mechanical data | | | | | |
| Weight | | approx. 320 g | | | |
| Mounting type | | on DIN rail (NS35 / 15, NS35 / 7.5) or mounting plate (4 x screw M6) | | | |
| Mounting position | | horizontal or vertical | | | |
| Casing / Terminal protection class | | IP 00 / IP 20 | | | |
| Casing material | | PA 6.6 | | | |
| Fire protecting class (UL-94) | | V0 | | | |




Signal loops

The diagrams below show typical applications. Please refer to the connection list to get the entire connection scheme. Basic technical parameters of the ISpac isolating repeaters can be found at the end of this document. The detailed specifications can be downloaded at: www.ispac.info.


Transmitter supply unit (AI)
for 2-, 3-wire transmitter and mA sources
for 2-wire transmitter with HART

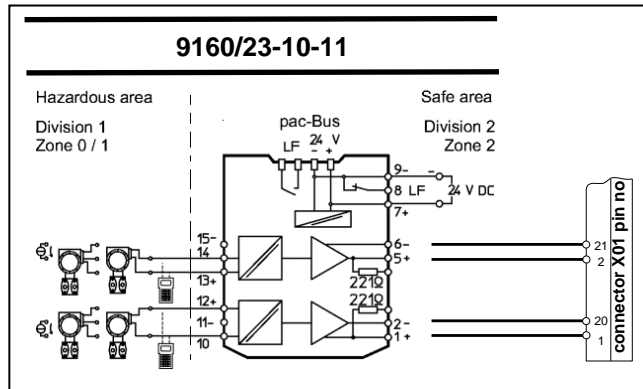

Isolating Repeater (AO)
for control valves, i/p-converters or indicators
bi-directional HART communication

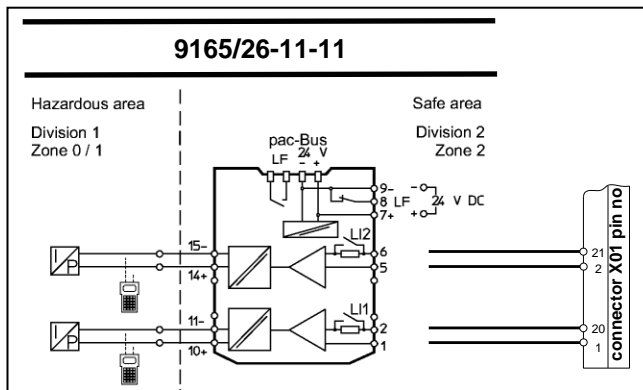


Temperature transmitter (AI)
for resistance thermometer, thermocouple and RTD
(Configuration by means of DIP Switches or
ISpac Wizard software)

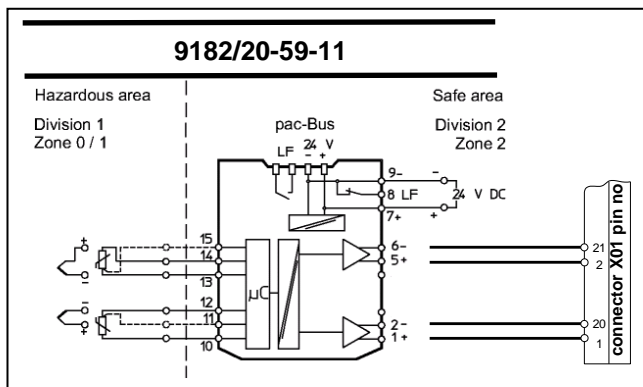


*) Suitable for 4-wire (Pins: 10, 11, 12, and 14).
The connection of two sensors in 4-wire scheme requires an additional external terminal.



Accessories and Spare Parts

| Designation | Illustration | Description | Order number |
|-----------------------------|---|---|----------------|
| Non-Ex i Termination Module |  <p>06314E00</p> | The termination module is used to integrate non-Ex i field circuit into the system integration solution pac-Carrier type 9195. In such a way it enables a flexible mixture of Ex i and non-Ex i field circuits. | 9191/20-00-50s |
| System cable | | Customized system cable type 9195/C-009 for DeltaV I/O Module with Sub-D 37 system cable 40 x 0,35 (AWG 28) grey | 9195/C-009 |

Dimension drawings (all dimensions in mm) - subject to alterations

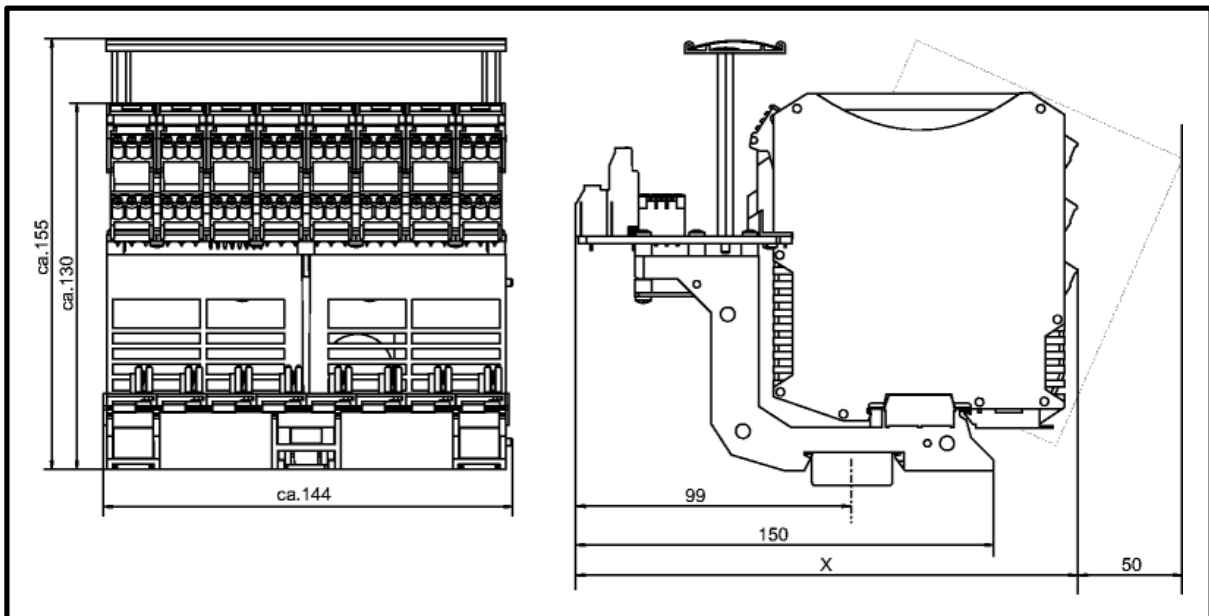

12472E00

| | Dimension x |
|----------------------|-------------|
| Screw terminals | 176 mm |
| Cage clamp terminals | 186 mm |

Please note: In order to snap in the ISpac modules an extra space of approx. 50 mm is required. Please read the "ISpac engineering guideline" carefully before you start to engineer the enclosures with incorporated ISpac modules with or without pac-Carriers. The "ISpac engineering guideline" can be downloaded from: www.ispac.info.



Connection list


| channel | terminal I.S. modules | | carrier slot | X01 (Sub-D 37) | | 16 pole Connector 1 | 16 pole Connector 2 | Cable 9195/C-009 color code |
|---------|----------------------------------|----------|--------------|----------------|----------|---------------------|---------------------|-----------------------------|
| | AI: 9160 AO: 9165 AI: 9182 | polarity | | | polarity | | | |
| 1 | 1*) | + | 1 | 1 | + | 1 | 1 | White |
| | | - | | 20 | - | | | Brown |
| | 1*) | + | | 2 | + | | 2 | Green |
| | | - | | 21 | - | | | 2 |
| 3 | 1*) | + | 2 | 3 | + | | 3 | Gray |
| | | - | | 22 | - | | | 3 |
| 4 | 1*) | + | | 4 | + | | 4 | Blue |
| | | - | | 23 | - | | | 4 |
| 5 | 1*) | + | 3 | 5 | + | | 5 | Black |
| | | - | | 24 | - | | | 5 |
| 6 | 1*) | + | | 6 | + | | 6 | gray-pink |
| | | - | | 25 | - | | | 6 |
| 7 | 1*) | + | 4 | 7 | + | | 7 | white-green |
| | | - | | 26 | - | | | 7 |
| 8 | 1*) | + | | 8 | + | | 8 | white-yellow |
| | | - | | 27 | - | | | 8 |
| 9 | 1*) | + | 5 | 9 | + | | 9 | white-gray |
| | | - | | 28 | - | | | 9 |
| 10 | 1*) | + | | 10 | + | | 10 | white-pink |
| | | - | | 29 | - | | | 10 |
| 11 | 1*) | + | 6 | 11 | + | | 11 | white-blue |
| | | - | | 30 | - | | | 11 |
| 12 | 1*) | + | | 12 | + | | 12 | white-red |
| | | - | | 31 | - | | | 12 |
| 13 | 1*) | + | 7 | 13 | + | | 13 | white-black |
| | | - | | 32 | - | | | 13 |
| 14 | 1*) | + | | 14 | + | | 14 | gray-green |
| | | - | | 33 | - | | | 14 |
| 15 | 1*) | + | 8 | 15 | + | | 15 | pink-green |
| | | - | | 34 | - | | | 15 |
| 16 | 1*) | + | | 16 | + | | 16 | green-blue |
| | | - | | 35 | - | | | 16 |
| | not used | | | 17 | | | | green-red |
| | not used | | | 36 | | | | yellow-red |
| | not used | | | 18 | | | | green-black |
| | not used | | | 37 | | | | yellow-black |
| | not used | | | 19 | | | | gray-blue |
| | not used | | | 38 | | | | pink-blue |
| | not used | | | 39 | | | | gray-red |
| | not used | | | 40 | | | | pink-red |

*) different possibilities of field device connections; for further information see: manual of: 9160/23-10-11, 9165/26-11-11 and 9182/20-59-11

We reserve the right to make alterations to the technical data, weights, dimensions, designs and products available without notice. The illustration cannot be considered binding

**pac-Carrier
Type 9195/16A-XX0-03B3**


- Signal types: 32 x DI or 32 x DO
- pac-Carrier for 16 modules, up to 32 signals
- ISpac isolator 9170/20-10-11, 9175/20-1X-11 and 9176/20-1X-00 can be used
- Customized system cable type 9195/C-009 to automation systems
- Redundant power supply with message contact and exchangeable fuses
- Horizontal or vertical installation
- Simple installation on DIN rail or mounting plate
- Many labeling possibilities
- Fast and secure installation of the isolators without tools
- Comfortable exchange of the isolators with secured ejector mechanism
- Installation possible in Zone 2, Zone 22 (non conductible dust) and Div. 2

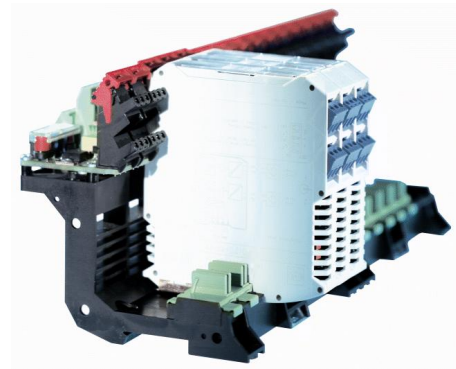

05179E00

Comfortable and simple integration of the Ex i / I.S. isolators ISpac. Flexible wiring possibilities on the system side with screw terminals.

System overview

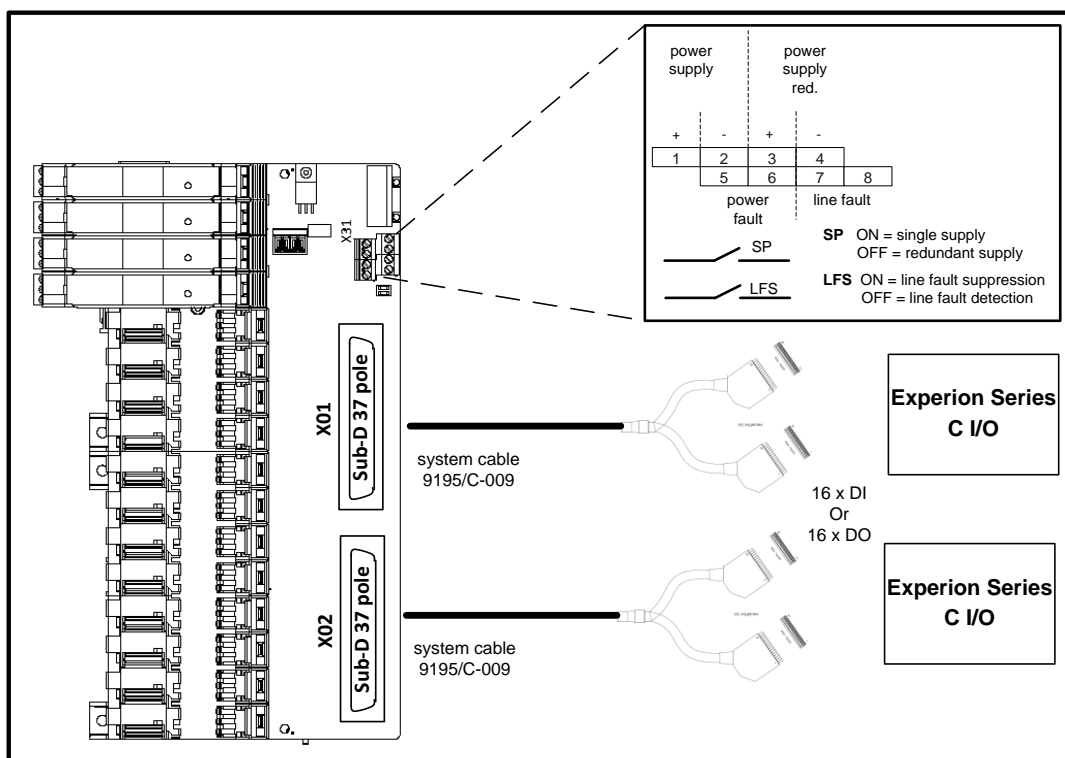


| Selection table | | | | | |
|-------------------------------------|----------|--|-------------|------------------|-------------------|
| Control system | | | pac-Carrier | | |
| DCS manufacturer | DCS type | Signal type | Slots | Stahl Cable type | Type |
| ALL | ALL | 32 x DI | 16 | 9195/C-009 | 9195/16A-XX0-03B3 |
| | | 32 x DO | | | |
| Technical data | | | | | |
| Certificates | | BVS 03 ATEX E213 X | | | |
| Explosion protection | | ⊕ II 3 G Ex nA nC II T4 | | | |
| Installation | | In Zone 2, Zone 22 (non conductible dust), Div. 2 and in the safe area | | | |
| Power supply | | (X31) | | | |
| Nominal voltage U_N | | 24 V DC (19 V ... 31,2 V) | | | |
| Redundant supply | | yes, decoupled with diodes | | | |
| Indication | | 2 LED green „PWR1“; „PWR2“ | | | |
| Fuse | | 2 x TR5; T 2,0 A; exchangeable, for primary and redundant supply | | | |
| Polarity reversal protection | | yes | | | |
| Connection field devices | | | | | |
| Connection | | at the terminals of the I.S. isolators (see "signal loops") | | | |
| Number of channels | | 32 | | | |
| Connection automation system | | (X01) | | | |
| Connection | | plug Sub-D 37 pole for 9195/C-009 | | | |
| Number of channels | | up to 16 | | | |
| Connection automation system | | (X02) | | | |
| Connection | | plug Sub-D 37 pole for 9195/C-009 | | | |
| Number of channels | | up to 16 | | | |
| Error messaging | | (X31) | | | |
| Power supply failure PF | | Contact (35 V / 100 mA), closed in good conditions | | | |
| Line fault LF (of ISpac modules) | | Contact (35 V / 100 mA), closed in good conditions | | | |
| Setting switch „SP“ | | Power failure message suppressed for redundant supply (single supply) | | | |
| Setting switch „LFS“ | | Line fault message suppressed | | | |
| Ambient conditions | | | | | |
| Ambient temperature | | max. - 20 °C ... + 70 °C (see specification of the I.S. isolators) | | | |
| Storage temperature | | - 40 °C ... + 80 °C | | | |
| Relative humidity (no condensation) | | ≤95 % | | | |
| Mechanical data | | | | | |
| Weight | | approx. 320 g | | | |
| Mounting type | | on DIN rail (NS35 / 15, NS35 / 7.5) or mounting plate (4 x screw M6) | | | |
| Mounting position | | horizontal or vertical | | | |
| Casing / Terminal protection class | | IP 00 / IP 20 | | | |
| Casing material | | PA 6.6 | | | |
| Fire protecting class (UL-94) | | V0 | | | |

Signal loops

The diagrams below show typical applications. Please refer to the connection list to get the entire connection scheme. Basic technical parameters of the ISpac isolating repeaters can be found at the end of this document. The detailed specifications can be downloaded at: www.ispac.info.


Switching repeater (DI)

for NAMUR proximity switches and contacts
- relay output

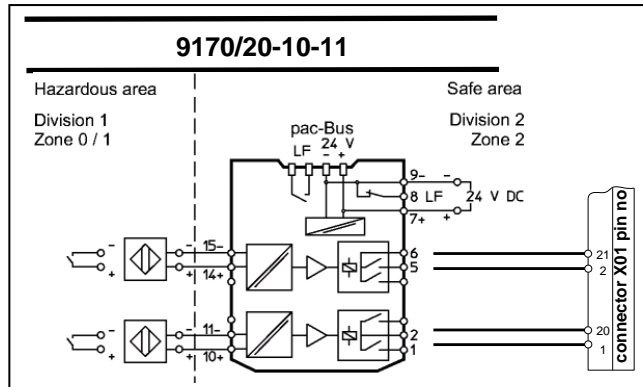


Digital output (DO)

for solenoid valves and indicators

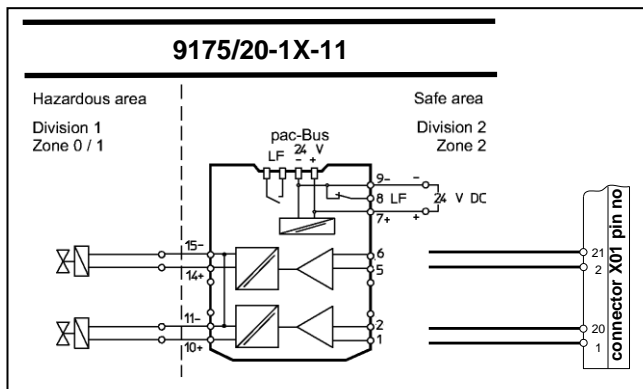


Digital output (DO)


for solenoid valves and indicators
- loop powered

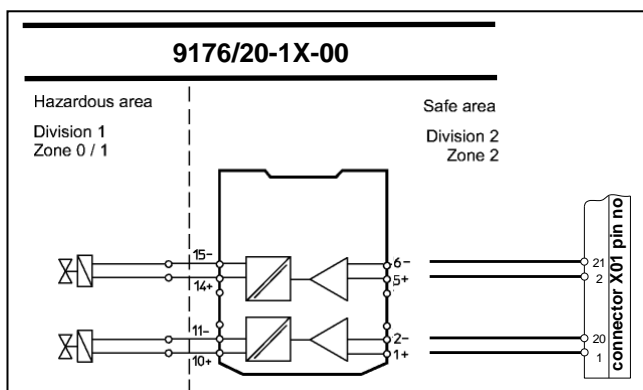

Accessories and Spare Parts

| Designation | Illustration | Description | Order number |
|-----------------------------|---|---|----------------|
| Non-Ex i Termination Module |  <p>06314E00</p> | The termination module is used to integrate non-Ex i field circuit into the system integration solution pac-Carrier type 9195. In such a way it enables a flexible mixture of Ex i and non-Ex i field circuits. | 9191/20-00-50s |
| System cable | | Customized system cable type 9195/C-009 for DeltaV I/O Module with Sub-D 37 system cable 40 x 0,35 (AWG 28) grey | 9195/C-009 |

Dimension drawings (all dimensions in mm) - subject to alterations

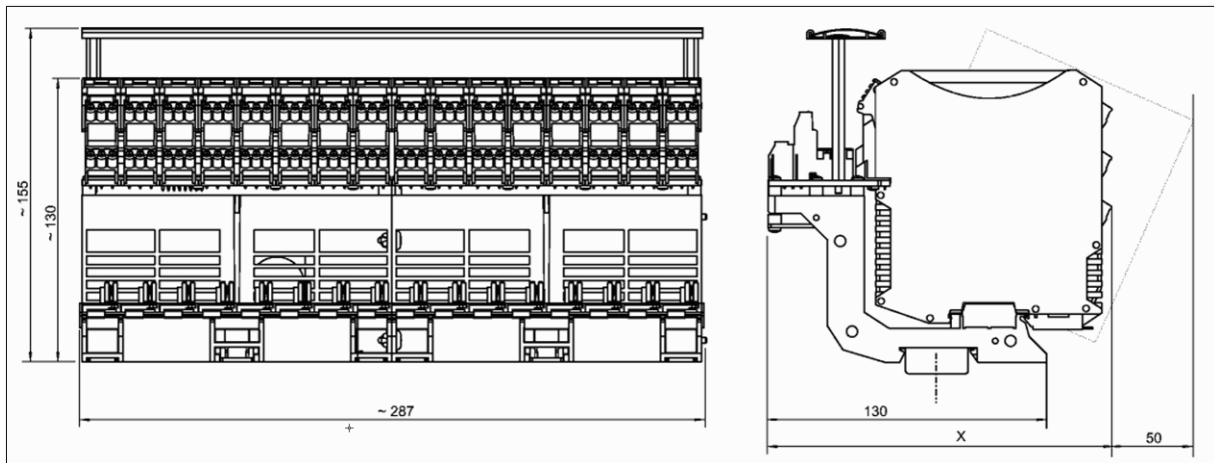

12472E00

| | Dimension x |
|----------------------|-------------|
| Screw terminals | 176 mm |
| Cage clamp terminals | 186 mm |

Please note: In order to snap in the ISpac modules an extra space of approx. 50 mm is required. Please read the "ISpac engineering guideline" carefully before you start to engineer the enclosures with incorporated ISpac modules with or without pac-Carriers. The "ISpac engineering guideline" can be downloaded from: www.ispac.info.

Connection list

| channel | terminal I.S. modules | | carrier slot | X01 (Sub-D 37) | | 16 pole Connector 1 | 16 pole Connector 2 | Cable 9195/C-009 color code | |
|---------|----------------------------------|----------|--------------|----------------|----------|---------------------|---------------------|-----------------------------|--------------|
| | DI: 9170 DO: 9175 DO: 9176 | polarity | | | polarity | | | | |
| 1 | 1*) | + | 1 | 1 | + | 1 | 1 | White | |
| | | - | | 20 | - | | | Brown | |
| 2 | 1*) | + | | 2 | + | 2 | 2 | Green | |
| | | - | | 21 | - | | | Yellow | |
| 3 | 1*) | + | | 2 | 3 | + | 3 | 3 | Gray |
| | | - | | | 22 | - | | | Pink |
| 4 | 1*) | + | | | 4 | + | 4 | 4 | Blue |
| | | - | | | 23 | - | | | Red |
| 5 | 1*) | + | 3 | | 5 | + | 5 | 5 | Black |
| | | - | | | 24 | - | | | Purple |
| 6 | 1*) | + | | | 6 | + | 6 | 6 | gray-pink |
| | | - | | | 25 | - | | | red-blue |
| 7 | 1*) | + | | 4 | 7 | + | 7 | 7 | white-green |
| | | - | | | 26 | - | | | brown-green |
| 8 | 1*) | + | | | 8 | + | 8 | 8 | white-yellow |
| | | - | | | 27 | - | | | yellow-brown |
| 9 | 1*) | + | 5 | | 9 | + | 9 | 9 | white-gray |
| | | - | | | 28 | - | | | gray-brown |
| 10 | 1*) | + | | | 10 | + | 10 | 10 | white-pink |
| | | - | | | 29 | - | | | pink-brown |
| 11 | 1*) | + | | 6 | 11 | + | 11 | 11 | white-blue |
| | | - | | | 30 | - | | | brown-blue |
| 12 | 1*) | + | | | 12 | + | 12 | 12 | white-red |
| | | - | | | 31 | - | | | brown-red |
| 13 | 1*) | + | 7 | | 13 | + | 13 | 13 | white-black |
| | | - | | | 32 | - | | | brown-black |
| 14 | 1*) | + | | | 14 | + | 14 | 14 | gray-green |
| | | - | | | 33 | - | | | yellow-gray |
| 15 | 1*) | + | | 8 | 15 | + | 15 | 15 | pink-green |
| | | - | | | 34 | - | | | yellow-pink |
| 16 | 1*) | + | | | 16 | + | 16 | 16 | green-blue |
| | | - | | | 35 | - | | | yellow-blue |
| | not used | | | | 17 | | | | green-red |
| | not used | | | | 36 | | | | yellow-red |
| | not used | | | | 18 | | | | green-black |
| | not used | | | | 37 | | | | yellow-black |
| | not used | | | 19 | | | | gray-blue | |
| | not used | | | 38 | | | | pink-blue | |
| | not used | | | 39 | | | | gray-red | |
| | not used | | | 40 | | | | pink-red | |

*) different possibilities of field device connections; for further information see: manual of: 9170/20-10-11, 9175/20-1X-11 and 9176/20-1X-00

We reserve the right to make alterations to the technical data, weights, dimensions, designs and products available without notice. The illustration cannot be considered binding



Connection list

| channel | terminal I.S. modules | | carrier slot | X02 (Sub-D 37) | | 16 pole Connector 1 | 16 pole Connector 2 | Cable 9195/C-009 color code |
|---------|----------------------------------|----------|--------------|----------------|----------|---------------------|---------------------|-----------------------------|
| | DI: 9170 DO: 9175 DO: 9176 | polarity | | | polarity | | | |
| 17 | 1*) | + | 1 | 1 | + | | 1 | White |
| | | - | | 20 | - | 1 | | Brown |
| 18 | 1*) | + | 1 | 2 | + | | 2 | Green |
| | | - | | 21 | - | 2 | | Yellow |
| 19 | 1*) | + | 2 | 3 | + | | 3 | Gray |
| | | - | | 22 | - | 3 | | Pink |
| 20 | 1*) | + | 2 | 4 | + | | 4 | Blue |
| | | - | | 23 | - | 4 | | Red |
| 21 | 1*) | + | 3 | 5 | + | | 5 | Black |
| | | - | | 24 | - | 5 | | Purple |
| 22 | 1*) | + | 3 | 6 | + | | 6 | gray-pink |
| | | - | | 25 | - | 6 | | red-blue |
| 23 | 1*) | + | 4 | 7 | + | | 7 | white-green |
| | | - | | 26 | - | 7 | | brown-green |
| 24 | 1*) | + | 4 | 8 | + | | 8 | white-yellow |
| | | - | | 27 | - | 8 | | yellow-brown |
| 25 | 1*) | + | 5 | 9 | + | | 9 | white-gray |
| | | - | | 28 | - | 9 | | gray-brown |
| 26 | 1*) | + | 5 | 10 | + | | 10 | white-pink |
| | | - | | 29 | - | 10 | | pink-brown |
| 27 | 1*) | + | 6 | 11 | + | | 11 | white-blue |
| | | - | | 30 | - | 11 | | brown-blue |
| 28 | 1*) | + | 6 | 12 | + | | 12 | white-red |
| | | - | | 31 | - | 12 | | brown-red |
| 29 | 1*) | + | 7 | 13 | + | | 13 | white-black |
| | | - | | 32 | - | 13 | | brown-black |
| 30 | 1*) | + | 7 | 14 | + | | 14 | gray-green |
| | | - | | 33 | - | 14 | | yellow-gray |
| 31 | 1*) | + | 8 | 15 | + | | 15 | pink-green |
| | | - | | 34 | - | 15 | | yellow-pink |
| 32 | 1*) | + | 8 | 16 | + | | 16 | green-blue |
| | | - | | 35 | - | 16 | | yellow-blue |
| | not used | | | 17 | | | | green-red |
| | not used | | | 36 | | | | yellow-red |
| | not used | | | 18 | | | | green-black |
| | not used | | | 37 | | | | yellow-black |
| | not used | | | 19 | | | | gray-blue |
| | not used | | | 38 | | | | pink-blue |
| | not used | | | 39 | | | | gray-red |
| | not used | | | 40 | | | | pink-red |

*) different possibilities of field device connections; for further information see: manual of: 9170/20-10-11, 9175/20-1X-11 and 9176/20-1X-00

We reserve the right to make alterations to the technical data, weights, dimensions, designs and products available without notice. The illustration cannot be considered binding



Notes:



A small logo consisting of the word 'STAH' in white capital letters inside a black octagonal border.A larger logo consisting of the word 'STAH' in white capital letters inside a blue octagonal border.**R. STAHL Schaltgeräte GmbH**

Am Bahnhof 30, D-74638 Waldenburg, Germany

Telefon +49 7942 943-0

Telefax +49 7942 943-4333

E-Mail: info.ex@stahl.deInternet: <http://www.stahl.de>

S – EG / EP – 9195 – 3 – en – 01 / 2010