



3-dimensional modular system BASIC

Reinforced glassfibre polyester parts, sandwich construction, insulated with polyurethane foam core
 Textured surface in grey RAL 7032
 Protection class IP65: single door
 Protection class IP54: double door

Vertical c-rails provided on the rear wall
 Door locking: Double-bit lock insert in stainless steel for cabinet series 100 with single doors; otherwise with additional three-point locking device and polyamide handle.

Arrangement


Floor
 Sandwich-floor with PU-foam core 25 mm (standard)
 Upon special request: GRP 5 mm
 GRP 5 mm with opening size (floor version C BASIC)

Options

MP mounting plate
 FA/FS acrylic glass/ safety glass window

SG Burglary-resistant swing handle with profile cylinder to DIN 18252 (lockable) series 100, single door:
 with / without 3-point locking device
 C-VA Vertical c-rails in stainless steel instead of anodized aluminium
 GO Antistatic to avoid electrostatic charges according to EN IEC 60079-0
 SB Floor fastening (see data sheet Sd526-xe „Fastenings for BASIC floor versions“)
 WA Wall fastening inside/ outside
 SZ Ground vault for installation in the ground

All combinations are possible !

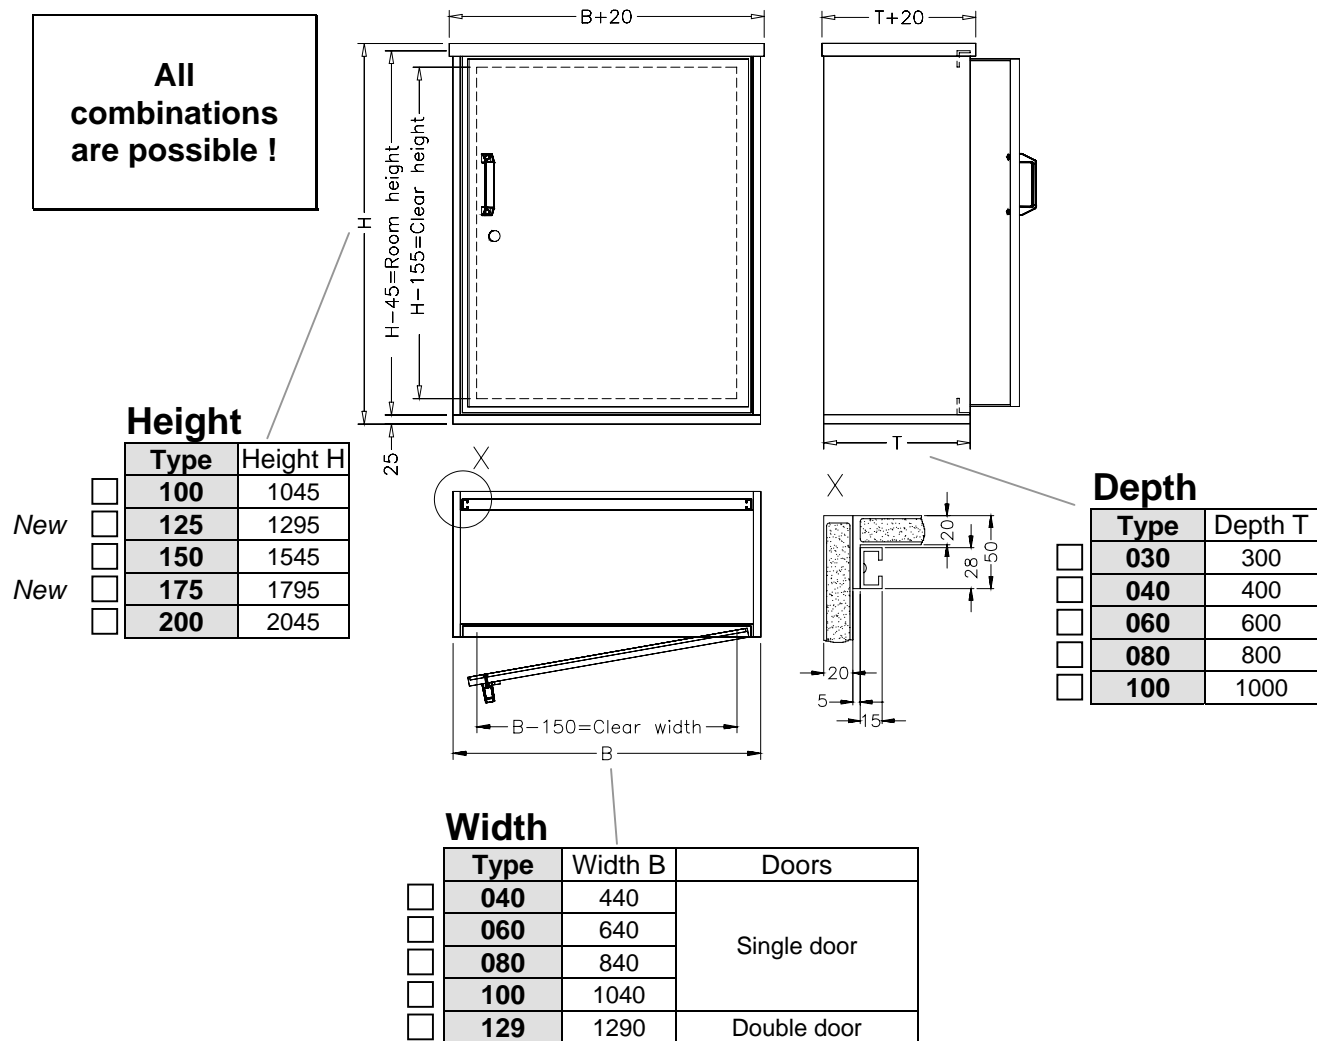

The cabinet designation is composed of the individual types, e.g.

100.080.060

Height. Width. Depth