

FP

Parallel Constant Watt Heating Cable

Product Specifications

Application . . .

Freeze Protection or Process Temperature Maintenance

FP parallel resistance constant watt heating cables are designed to provide freeze protection or process temperature maintenance to piping, tanks and equipment. The parallel resistance configuration allows the cable to be cut to length and terminated in the field with easy-to-use Thermon supplied kits.

FP cables provide consistent and reliable heat outputs regardless of circuit length. Because FP cables are not subject to the inrush current associated with self-regulating heating cables, the need for oversizing power distribution equipment is eliminated.

FP cables are approved for use in ordinary (nonclassified) areas and Categories 2 and 3 ATEX classified areas.¹

Ratings . . .

Maximum Watt density ²	33 W/m
Maximum supply voltage ³	575 Vac
Maximum maintenance temperature ⁴	65°C
Maximum continuous exposure temperature	
Power-off	200°C
Minimum installation temperature	-60°C
Minimum bend radius	
@ -15°C	10 mm
@ -60°C	19 mm

Basic Accessories⁵ . . .

Power Connection: All FP cables require a TBX-4L power connection kit for terminating the circuit before connecting to power.

End-of-Circuit Termination: FP cables with overjacket require the ET-8 end cap and ET-80 over cap for terminating at the end of the circuit.

Product Features . . .

- Withstands Continuous Flamability Testing According to IEC 60332-1: 1993
- Allows Cable to be Installed at Temperatures to -60°C
- Low In-Rush Current
- Terminations for System Tested for Ozone Stability, UV Stability and Flamability Testing According to ISO/IEC Requirements
- Provides Consistent and Reliable Heat Outputs


Notes . . .

1. Contact Thermon for assistance with stabilized designs for hazardous areas.
2. Additional power outputs are shown on page 2.
3. Additional operating voltages are shown on page 2.
4. Higher maintenance temperatures may be possible; contact Thermon for design assistance.
5. Information on additional accessories to complete a heater circuit installation and to comply with approval requirements is available, contact Thermon.

THERMON . . . The Heat Tracing Specialists®
www.thermon.com

European Headquarters
Boezenweg 25 • PO Box 205
2640 AE Pijnacker • The Netherlands
Phone: +31 (0) 15-36 15 370

Corporate Headquarters
100 Thermon Dr. • PO Box 609
San Marcos, TX 78667-0609 • USA
Phone: +1 512-396-5801

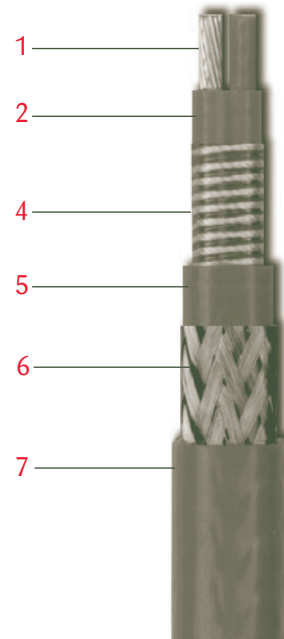

Construction . . .

- 1 Copper Bus Wires (3,3 mm²)
- 2 Nichrome Heating Element
- 3 Heater Bus Connection (not shown)
- 4 Fiberglass Overlay
- 5 Fluoropolymer Dielectric Insulation
- 6 Tinned Copper Braid
- 7 Fluoropolymer overjacket provides additional protection to cable and braid where exposure to chemicals or corrosives is expected.

Certifications/Approvals . . .



European Organisation for Electrotechnical Standardisation
Hazardous (Classified) Locations



II 2 G Ex e IIC T2 to T6 LCIE 01 ATEX 6051X



International Electrotechnical Commission
IEC Certification Scheme for Explosive Atmospheres
FMG 06.0008



FM Approvals
Hazardous (Classified) Locations



Underwriters Laboratories Inc.
Hazardous (Classified) Locations

FP has additional hazardous area approvals including:

- CCE/CMRS

Contact Thermon for additional approvals and specific information.



For the Thermon office nearest you
visit us at . . .
www.thermon.com

FP

Parallel Constant Watt Heating Cable

Product Specifications

Power Output . . .

The rated power output of FP cables is shown in the table below for the voltages indicated. The heating zone length is the distance between bus connections and represents the minimum circuit length for this type of cable. For maximum possible circuit lengths, see Circuit Breaker Sizing to the right. Contact Thermon before connecting cable to voltages other than those shown in this chart.

Product Type	Service Voltage	Zone Length cm	Power Output W(m)
FP 2.5-2	230	137	8
FP 5-2	230	102	15
FP 8-2	230	102	24
FP 10-2	230	76	30
FP 8-4	400	152	18
FP 10-4	400	137	23
FP 10.5	575	168	33

Circuit Breaker Sizing and Type . . .

Maximum circuit lengths for FP cables at rated voltages are shown below. Circuit breaker sizing should be based on local codes. For information on design and performance on other voltages, contact Thermon.

Ground-fault protection of equipment shall be provided for each branch circuit supplying electric heating equipment.

Product Type	Service Voltage	Absolute Max. Circuit Length ¹ m	Current Draw A/m
FP 2.5-2	230	375	0.035
FP 5-2	230	257	0.065
FP 8-2	230	195	0.130
FP 10-2	230	170	0.130
FP 8-4	400	370	0.045
FP 10-4	400	351	0.058
FP 10-5	575	393	0.056

Note . . .

1. Circuit length is dependant on ampacity of the circuit breaker. To determine the maximum circuit length for a circuit breaker, multiply the current draw of the cable (A/m) by 1.10 and divide this value into the current rating (A) of the circuit breaker.

